Graphene -X Composite Grade



This few layers Graphene used as a reinforcing filler in composite materials due to its exceptional mechanical, electrical, thermal and barrier properties. It enhances the performance of composite at a very low cost on matrix. Technologies Graphene X (Composite Grade) ADG-X Net Weight ww.ad-nanotech.com ADG-X

AdNano Technologies Pvt. Ltd.,


#31L, 2nd Cross, KIADB Machanahalli Industrial Area, Shivamogga - 577 222, Karnataka, INDIA +91 82967 34214/15 (www.ad-nanotech.com info@ad-nanotech.com

PRODUCT FEATURES

Advantages


- When incorporated into a composite material, this few layer graphene can significantly increase its tensile strength, toughness, and stiffness, leading to enhanced structural performance.
- Its high electrical conductivity allows it to act as a conductive filler in composites, improving their electrical properties.
- It can facilitate the efficient transfer of heat, resulting in enhanced thermal conductivity and heat dissipation capabilities.
- When incorporated into composites, it can enhance their barrier properties, preventing the diffusion or permeation of substances.
- It can integrated into composites using various manufacturing techniques, such as solution mixing, roll mixing and melt blending

Applications

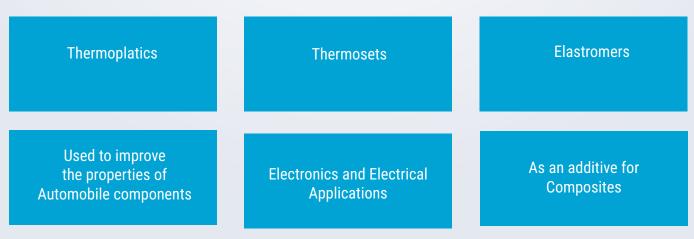

TECHNICAL DATA SHEET

S	ADG-X	DESCRIPTION
Ē	PURITY	>99%
Ω	PARTICLE SIZE	D50: <20µ
IFIC	THICKNESS	5-10 nm
ICATI	BULK DENSITY	~0.11 g/cm ³
\exists	PHYSICAL FORM	POWDER
\bigcirc	COLOUR	BLACK
Z	SURFACE AREA	~ 70-120 m ² /g
	CAS NO.	1034343-98-0

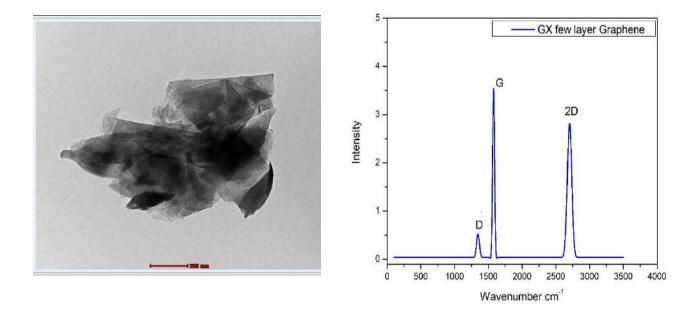

DISCLAIMER

The values are typical and are for very general guidance and must not be used as a basis for specifications as concrete. Information contained in this publication, and otherwise supplied to users, is based on our general experience and is given in good faith, but we are unable to accept responsibility in respect of factors which are outside our knowledge or control. No warranty, either expressed or implied, is hereby made. The recommended industrial hygiene and safe handling procedures are believed to be generally applicable. Please refer to MSDS of respective product for safe use.